
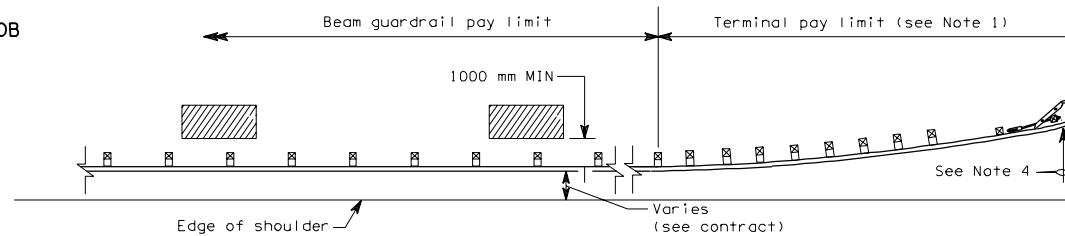


#### NOTES


1. SRT Terminal shown, for terminal type and details, see Contract or applicable Standard Plan(s).
2. Post spacing is 1905 mm except where noted.
3. Type 4 anchor required. See applicable Standard Plan(s).
4. The slope from the edge of the shoulder into the face of the guardrail should not exceed 1:10 when the guardrail is within 3.6 meters from the edge of the shoulder.

FLARE RATE TABLE	
Rate	Posted Speed (MPH)
15:1	70
13:1	60
12:1	45 to 55
9:1	40 or less

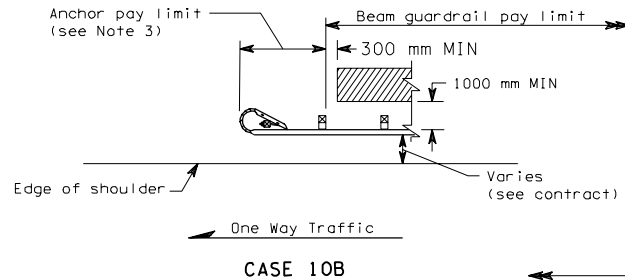

ALL DIMENSIONS ARE IN MILLIMETERS  
UNLESS OTHERWISE NOTED

#### GUARDRAIL PLACEMENT

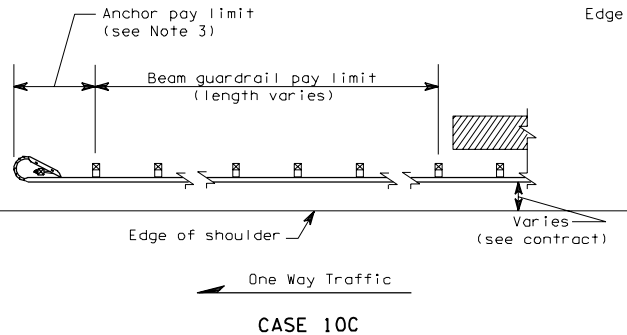

#### STANDARD PLAN C-2d

APPROVED FOR PUBLICATION

STATE DESIGN ENGINEER

DATE

WASHINGTON STATE DEPARTMENT OF TRANSPORTATION  
OLYMPIA, WASHINGTON